

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
29 July 2004 (29.07.2004)

PCT

(10) International Publication Number
WO 2004/063242 A1

- (51) International Patent Classification⁷: **C08G 18/38**, (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/US2004/000097
- (22) International Filing Date: 2 January 2004 (02.01.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/437,957 3 January 2003 (03.01.2003) US
- (71) Applicant (for all designated States except US): **E.I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **COCORAN, Patrick, Henry** [US/US]; 25 Laurel Hill Drive, Cherry Hill, NJ 08003 (US). **WEBER, Joseph, Norbert** [US/US]; 24 Welwyn Road, Newark, DE 19711 (US).
- (74) Agent: **DESHMUKH, Sudhir, G.**; E.I. Du Pont de Nemours and Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, DE 19805 (US).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DURABLE COATING COMPOSITIONS CONTAINING ASPARTIC COMPOUNDS

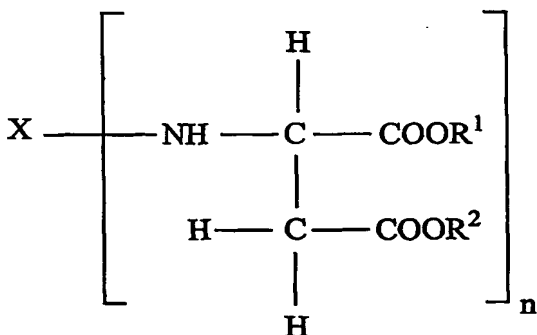

(57) Abstract: A coating composition comprising a binder of a. polyisocyanate crosslinking agent; b. an isocyanate-reactive component having at least one compound having the following formula: wherein X is an aliphatic or cycloaliphatic group, R¹ and R² are the same or different organic groups that are inert to isocyanate groups, and n is 2 to 4, and c. optionally, a polymeric component having a number average molecular weight of 5,000 to 50,000 having reactive groups that crosslink with an isocyanate, where the reactive groups are hydroxyl, carboxyl, glycidyl, amine and any mixtures thereof; and d. optionally, an oligomeric component having a number average molecular weight of 300 to 3,000 having reactive groups that crosslink with an isocyanate, where the reactive groups are hydroxyl, carboxyl, glycidyl, amine, aldimines, phosphoric acid, ketimine and any mixtures thereof; and contains the following ad-

ditives: disubstituted phenol antioxidant or a hydroperoxide decomposer, an ultraviolet light absorber, and a hindered amine light stabilizer.

WO 2004/063242 A1

TITLE**DURABLE COATING COMPOSITIONS CONTAINING ASPARTIC COMPOUNDS**

5

BACKGROUND OF THE INVENTION**Field of the Invention**

This invention is directed to coating compositions, in particular, to durable and weatherable coating compositions useful as clear finishes for automobiles and trucks.

10 **Description of the Prior Art**

The finishing system of choice presently being used on the exterior of automobiles and trucks comprises a clear coating applied over pigmented base coating that is applied over a primer coating. The clear coating provides protection, in particular protection from weathering, to the pigmented base coating and improves the appearance of the overall finish, in particular, provides improved gloss and distinctness of image. When used in refinishing of automobile and truck bodies, the clear coating is required to have a reasonably short cure time period to allow for further processing or handling of the vehicle with out damaging the finish.


20 The following US Patents: US 5,516,873, US 5,126,170, US 5,243,012, US 5,236,741, US 5,412,056, US 5,580,945, and US 6,005,062, show a variety of coating composition that contain polyaspartic acid derivatives but coating compositions formulated according to the teaching of these patents do not have the combination of properties of rapid cure and excellent weatherability that are currently desired for clear coating compositions and in particular, for such compositions that are used for the repair of the finishes of automotive and truck exterior finishes.

25 It would be desirable to form a clear coating composition that cures rapidly after application and provides a protective clear finish that has good gloss and distinctness of image that provides an excellent appearance, has excellent weatherability, in particular resistance to U.V. (ultraviolet light) degradation and also hardens in a reasonably short time after application.

SUMMARY OF THE INVENTION

A coating composition comprising a binder of

- a. polyisocyanate crosslinking agent;
- b. an isocyanate-reactive component having at least one compound having the following formula:

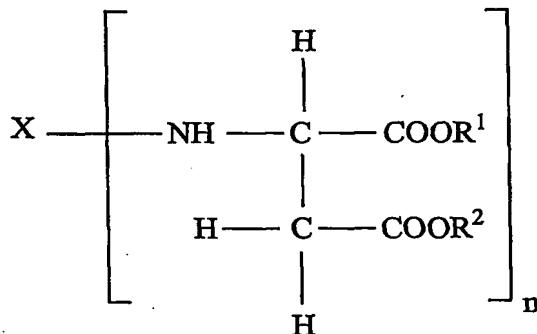

wherein X is an aliphatic or cycloaliphatic group, R¹ and R² are the same or different organic groups that are inert to isocyanate groups, and n is 2 to 4,

- c. optionally, a polymeric component having a number average molecular weight of 5,000 to 50,000 having reactive groups that crosslink with an isocyanate, where the reactive groups are hydroxyl, carboxyl, glycidyl, amine and any mixtures thereof; and
- d. optionally an oligomeric component having a number average molecular weight of 300 to 3,000 having reactive groups that crosslink with an isocyanate, where the reactive groups are hydroxyl, carboxyl, glycidyl, amine, aldimines, phosphoric acid, ketimine and any mixtures thereof; and

wherein the composition contains the following additives:

- (1) a disubstituted phenol antioxidant or a hydroperoxide decomposer,
- (2) an ultraviolet light absorber, and
- (3) a hindered amine light stabilizer.

DETAILED DESCRIPTION OF THE INVENTION

A typical auto or truck body is produced from a steel sheet or a plastic or a composite substrate. For example, the fenders may be of plastic or a composite and the main portion of the body of steel. If steel is used, it is first treated with an inorganic rust-proofing compound, such as, zinc or iron phosphate and then a primer coating is applied generally by electrodeposition. Typically, these electrodeposition primers are epoxy-modified resins crosslinked with a polyisocyanate and are applied by a cathodic electrodeposition process. Optionally, a primer can be applied over the electrodeposited primer, usually by spraying, to provide better appearance of a base coating or a mono coating applied over the primer and improve the adhesion of such coatings to the primer or both of the above. A mono coating of a pigmented coating composition then can be applied but preferably, a pigmented base coating with a clear top coating is applied to form a clear coat/color coat finish on the truck or automobile body or auto or truck part. Usually, after application, each of the coatings is cured by baking at an elevated temperature. It is generally known that a clear top coating can be applied over the base coating and both coatings cured together at an elevated temperature. When refinishing automobile and truck bodies, the coatings are usually cured at ambient temperatures or at slightly elevated temperatures, such as, 40 to 100°C.

A "clear coating composition" for automotive use is a composition that forms a transparent finish upon curing and has a DOI (distinctness of image) of more than 70 and a 20° gloss of more than 70. These clear coatings provide a glossy in depth appearance to the finish on the automobile or truck and therefore, are required to have good gloss and distinctness of image. Also, the clear finish also provides resistance to weathering, in particular to U.V. degradation and photo-oxidation.

The term "binder" as used herein refers to the film forming constituents of the composition that include the isocyanate reactive component, an optional polymeric and/or oligomeric component, polyisocyanate crosslinking agent and optional reactive diluents. Solvents, pigments, catalysts, rheology modifiers, antioxidants, U.V. absorbers, hindered amine light stabilizers, hydroperoxide decomposers leveling agents, antifoaming agents, anti-cratering agents, adhesion promoting agents are not included in the term.

Molecular weight (both number and weight average) is determined by gel permeation chromatography utilizing a high performance liquid chromatograph supplied by Hewlett-Packard, Palo Alto, California and unless otherwise stated the liquid phase used was tetrahydrofuran and the standard was polymethylmethacrylate or polystyrene.

"T_g" (glass transition temperature) is in °C and determined by Differential Scanning Calorimetry or calculated according to the Fox Equation.

Typically the binder of the novel composition comprises 20 to 80% by weight, based on the weight of the binder, of the isocyanate reactive component or aspartic acid derivative and 20 to 80% by weight, based on the weight of the binder, of a polyisocyanate crosslinking agent. Optionally, the binder can contain 1 to 50% by weight, preferably, 5 to 30% by weight, based on the weight of the binder, of a polymeric or oligomeric component or both wherein the component contains groups that are reactive with the polyisocyanate crosslinking agent. One preferred binder composition contains 25 to 50%, by weight of the aspartic acid derivative, 5 to 30% by weight of the polymeric or oligomeric component or both and 20 to 70% by weight of a polyisocyanate, wherein the sum of all of the components of the binder is 100%.


Particular advantages of the novel coating composition of this invention is that it provides a protective clear finish that has good gloss and distinctness of image that provides an excellent appearance, has excellent weatherability, in particular resistance to U.V. degradation and photo-oxidation and also hardens in a reasonably short time after application. For example, when used to refinish automobiles and trucks, the composition after application cures to a tack free state in a relatively short period of time under ambient temperatures or under slightly elevated drying temperatures, for example, 40 to 100°C, that allows a coated vehicle to be moved or further processed without damage to the finish.

The novel composition typically is solvent based and has a solids content of film forming binder of 20 to 90% by weight, preferably, 60 to 75% by weight. It may be possible to formulate a 100% solids composition with the use of reactive diluents. An aqueous liquid carrier, which typically is water but may contain other liquids, may be used in place of the solvent. Before application a sufficient amount of liquid

usually is added, for example, water or solvents, to reduce the composition to a spray viscosity.

In the event the novel coating composition is an aqueous based composition, the composition typically has a pH of 6.0 to 10.0 and preferably, 7.5 to 8.5. The pH may be adjusted by the addition of various amines.

The isocyanate reactive component of the novel composition is an aspartic acid derivative and is described in Zwiener et al. US Patent 5,236,741, issued Aug. 17, 1993, which is hereby incorporated by reference. These components have the formula

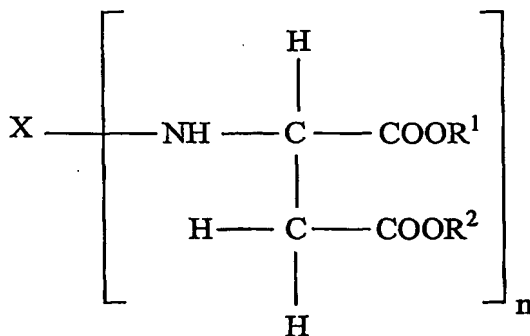

wherein X is an aliphatic or cycloaliphatic group, R¹ and R² are the same or different organic groups that are inert to isocyanate groups, and n is 2 to 4. Preferably, X is a cycloaliphatic group R¹ and R² are aliphatic groups and more preferably, are alkyl groups having 2 to 8 carbon atoms. One particularly preferred component is the reaction product of methylene bis(cyclohexyl amine) and a dialkyl maleate, preferably, diethyl maleate, in a 1:2 molar ratio.

The optional polymeric component has groups that are reactive with isocyanate and can be used in an amount of 1 to 50% by weight, based on the weight of the binder. One preferred polymeric component is an acrylic polymer. Typically useful acrylic polymers have a number average molecular weight of about 5,000 to 50,000, a Tg of 10 to 80 °C and contain moieties, such as, hydroxyl, carboxyl, glycidyl and amino groups. Typically useful acrylic polymers are those known in the art and are polymers of two or more of the following: linear alkyl (meth)acrylates having 1 to 12 carbon atoms in the alkyl group, cyclic or branched alkyl

(meth)acrylates having 3 to 12 carbon atoms in the alkyl group including isobornyl (meth)acrylate, hydroxy alkyl (meth)acrylates having 1 to 4 carbon atoms in the alkyl group, glycidyl (meth)acrylate, hydroxy amino alkyl (meth)acrylates having 1 to 4 carbon atoms in the alkyl group, and
5 can contain styrene, alpha methyl styrene, vinyl toluene, (meth)acrylonitrile (meth)acryl amides, (meth)acrylic acid, (meaning both acrylic acid and methacrylic acid) trimethoxysilylpropyl (meth)acrylate and the like.

Preferred are hydroxy functional acrylic polymers having a
10 hydroxy equivalent weight of 300 to 1300 and are polymers of hydroxy alkyl (meth)acrylates and one or more of the aforementioned monomers. One preferred hydroxy containing acrylic polymer contains 35 to 50% by weight styrene, 15 to 25% by weight ethylhexyl methacrylate and 15 to 20% by weight isobornyl methacrylate and 20 to 30% by weight
15 hydroxyethyl methacrylate. A particularly preferred acrylic polymer contains 37% styrene, 20% by weight 2-ethylhexyl methacrylate and 17.5% by weight of isobornyl methacrylate and 25.5% by weight hydroxyethyl methacrylate.

Acrylic oligomers having a number average molecular weight of
20 300 to 3,000 of the aforementioned monomeric components also can be used as the optional polymeric component. By using monomers and reactants well known to those skilled in the art, these oligomers can have the one or more of the following groups that are reactive with isocyanate: hydroxyl, carboxyl, glycidyl, amine, aldimine, phosphoric acid and
25 ketimine.

Polyesters can also be used as the optional polymeric component, such as, hydroxyl or carboxyl terminated or hydroxyl or carboxyl containing polyesters. The following are typically useful
polyesters or ester oligomers: polyesters or oligomers of caprolactone diol
30 and cyclohexane dimethylol, polyesters or oligomers of tris-hydroxy ethylisocyanurate and caprolactone, polyesters or oligomers of trimethylol propane, phthalic acid or anhydride and ethylene oxide, polyesters or oligomers of pentaerythritol, hexahydrophthalic anhydride and ethylene oxide, polyesters or oligomers of pentaerythritol, hexahydrophthalic
35 anhydride and butylene oxide.

The aforementioned polyesters and oligomers can be reacted with an organic isocyanate to form urethane polymers and oligomers that

can be used as the optional polymeric component in the novel composition.

One useful urethane oligomer that can be used in the novel composition is formed by reacting an aliphatic polyisocyanate with an aliphatic or cycloaliphatic monohydric alcohol and subsequently reacting the resulting composition with a hydroxy functional aliphatic carboxylic acid until all of the isocyanate groups have been reacted. One useful polyurethane oligomer comprises the reaction product of the isocyanurate of hexane diisocyanate, cyclohexanol and dimethylol propionic acid. To form a water dispersible oligomer, an amine is can be added.

Typically useful organic polyisocyanates crosslinking agents that can be used in the novel composition of this invention include aliphatic polyisocyanates, cycloaliphatic polyisocyanates and isocyanate adducts.

Examples of suitable aliphatic and cycloaliphatic polyisocyanates that can be used include the following: 4,4'-dicyclohexyl methane diisocyanate, ("H₁₂MDI"), trans-cyclohexane-1,4-diisocyanate, 1,6-hexamethylene diisocyanate ("HDI"), isophorone diisocyanate, ("IPDI"), other aliphatic or cycloaliphatic di-, tri- or tetra-isocyanates, such as, 1,2-propylene diisocyanate, tetramethylene diisocyanate, 2,3-butylene diisocyanate, octamethylene diisocyanate, 2,2,4-trimethyl hexamethylene diisocyanate, dodecamethylene diisocyanate, omega-dipropyl ether diisocyanate, 1,3-cyclopentane diisocyanate, 1,2 cyclohexane diisocyanate, 1,4 cyclohexane diisocyanate, 4-methyl-1,3-diisocyanatocyclohexane, dicyclohexylmethane-4,4'-diisocyanate, 3,3'-dimethyl-dicyclohexylmethane 4,4'-diisocyanate, polyisocyanates having isocyanurate structural units, such as, the isocyanurate of hexamethylene diisocyanate and the isocyanurate of isophorone diisocyanate, the adduct of 2 molecules of a diisocyanate, such as, hexamethylene diisocyanate, uretidiones of hexamethylene diisocyanate, uretidiones of isophorone diisocyanate and a diol, such as, ethylene glycol, the adduct of 3 molecules of hexamethylene diisocyanate and 1 molecule of water, allophanates, trimers and biurets of hexamethylene diisocyanate, allophanates, trimers and biurets of isophorone diisocyanate and the isocyanurate of hexane diisocyanate.

Tri-functional isocyanates also can be used, such as, Desmodur® N 3300, trimer of hexamethylene diisocyanate, Desmodur® 3400, trimer of isophorone diisocyanate, Desmodur® 4470 trimer of

isophorone diisocyanate, these trimers are sold by Bayer Corporation. A trimer of hexamethylene diisocyanate sold as Tolonate® HDT from Rhodia Corporation is also suitable.

5 An isocyanate functional adduct can be used, such as, an adduct of an aliphatic polyisocyanate and a polyol. Also, any of the aforementioned polyisocyanates can be used with a polyol to form an adduct. Polyols, such as, trimethylol alkanes, particularly, trimethylol propane or ethane can be used to form an adduct.

10 The novel composition can contain 0.1 to 5% by weight, based on the weight of the binder of acrylic NAD (non-aqueous dispersed) resins. These NAD resins typically are high molecular weight resins having a crosslinked acrylic core with a Tg between 20 to 100°C and attached to the core are low Tg stabilizer segments. A description of such NADs is found in Antonelli et al. US Patent 4,591,533 and in Barsotti et al. US
15 Patent 5,763,528 which patents are hereby incorporated by reference.

Typically, a catalyst is used in the novel composition to reduce curing time and temperature and allow curing of the coating at ambient temperatures. Useful catalysts include those known to the person skilled in the art, like, alkyl carboxylic acids having 1 to 12 carbon atoms in the
20 alkyl group, such as, acetic acid, formic acid, glycolic acid; aromatic acids, such as, benzoic acid; and oligomers having pendant acid groups.

The novel composition contains about 0.1 to 5% by weight, based on the weight of the binder, of ultraviolet light absorbers. Typically useful ultraviolet light absorbers include hydroxyphenyl benzotriazols,
25 such as, 2-(2-hydroxy-5-methylphenyl)-2H-benzotriazole, 2-(2-hydroxy-3,5-di-tert.amyl-phenyl)-2H-benzotriazole, 2[2-hydroxy-3,5-di(1,1-dimethylbenzyl)phenyl]-2H-benzotriazole, reaction product of 2-(2-hydroxy-3-tert.butyl-5-methyl propionate)-2H-benzotriazole and polyethylene ether glycol having a weight average molecular weight of
30 300, 2-(2-hydroxy-3-tert.butyl-5-iso-octyl propionate)-2H-benzotriazole; hydroxyphenyl s-triazines, such as, 2-[4((2,-hydroxy-3-dodecyloxy/tridecyloxypropyl)-oxy)-2-hydroxyphenyl]-4,6-bis(2,4-dimethylphenyl)-1,3,5-triazine, 2-[4(2-hydroxy-3-(2-ethylhexyl)-oxy)-2-hydroxyphenyl]-4,6-bis(2,4-dimethylphenyl)1,3,5-triazine, 2-(4-octyloxy-2-
35 hydroxyphenyl)-4,6-bis(2,4-dimethylphenyl)-1,3,5-triazine; hydroxybenzophenone U.V. absorbers, such as, 2,4-

dihydroxybenzophenone, 2-hydroxy-4-octyloxybenzophenone, and 2-hydroxy-4-dodecyloxybenzophenone.

The novel composition contains about 0.1 to 5% by weight, based on the weight of the binder, of a di-substituted phenol antioxidant or a hydroperoxide decomposer. Typically useful antioxidants include

5 tetrakis[methylene(3,5-di-tert-butylhydroxy hydrocinnamate)]methane, octadecyl 3,5-di-tert-butyl-4-hydroxyhydrocinnamate, tris(2,4-di-tert-butylphenyl) phosphite, 1,3,5-tris(3,5-di-tert-butyl-4-hydroxybenzyl)-1,3,5-triazine-2,4,6(1H,3H,5H)-trione and benzenepropanoic acid, 3,5-bis(1,1-

10 dimethyl-ethyl)-4-hydroxy-C7-C9 branched alkyl esters. Typically useful hydroperoxide decomposers include Sanko® HCA (9,10-dihydro-9-oxa-10-phosphenanthrene-10-oxide), triphenyl phosphate and other organophosphorous compounds, such as, Irgafos® TNPP from Ciba Specialty Chemicals, Irgafos® 168, from Ciba Specialty Chemicals, Ultrinox® 626

15 from GE Specialty Chemicals, Mark PEP-6 from Asahi Denka, Mark HP-10 from Asahi Denka, Irgafos® P-EPQ from Ciba Specialty Chemicals, Ethanox 398 from Albemarle, Weston 618 from GE Specialty Chemicals, Irgafos® 12 from Ciba Specialty Chemicals, Irgafos® 38 from Ciba Specialty Chemicals, Ultrinox® 641 from GE Specialty Chemicals and

20 Doverphos® S-9228 from Dover Chemicals.

The novel composition contains about 0.1-5% by weight, based on the weight of the binder, of hindered amine light stabilizers. Typically useful hindered amine light stabilizers include N-(1,2,2,6,6-pentamethyl-4-piperidiny)-2-dodecyl succinimide, N(1acetyl-2,2,6,6-tetramethyl-4-

25 piperidiny)-2-dodecyl succinimide, N-(2hydroxyethyl)-2,6,6,6-tetramethylpiperidine-4-ol-succinic acid copolymer, 1,3,5 triazine-2,4,6-triamine, N,N'-[1,2-ethanediybis[[[4,6-bis[butyl(1,2,2,6,6-pentamethyl-4-piperidiny)amino]-1,3,5-triazine-2-yl]imino]-3,1-propanediy]]bis[N, N"-dibutyl-N',N"-bis(1,2,2,6,6-pentamethyl-4-piperidiny)], poly-[[6-[1,1,3,3-

30 tetramethylbutyl)-amino]-1,3,5-trianzine-2,4-diy]]-[2,2,6,6-tetramethylpiperidiny)-imino]-1,6-hexane-diyl[(2,2,6,6-tetramethyl-4-piperidiny)-imino]), bis(2,2,6,6-tetramethyl-4-piperidiny)sebacate, bis(1,2,2,6,6-pentamethyl-4-piperidiny)sebacate, bis(1-octyloxy-2,2,6,6-tetramethyl-4-piperidiny)sebacate, bis(1,2,2,6,6-pentamethyl-4-

35 piperidiny)[3,5bis(1,1-dimethylethyl-4-hydroxy-phenyl)methyl]butyl propanedioate, 8-acetyl-3-dodecyl-7,7,9,9,-tetramethyl-1,3,8-

triazaspiro(4,5)decane-2,4-dion, dodecyl/tetradecyl-3-(2,2,4,4-tetramethyl-2l-oxo-7-oxa-3,20-diazal dispiro(5.1.11.2)henicosan-20-yl)propionate.

Typically, the composition is a solvent based composition and any of the known organic solvents may be used to form the coating
5 composition. Typical solvents include aromatic hydrocarbons, such as, toluene, xylene; ketones, such as, acetone, methyl ethyl ketone, methyl isobutyl ketone, methyl amyl ketone and diisobutyl ketone; esters, such as, ethyl acetate, n-butyl acetate, isobutyl acetate; and mixtures of any of the above.

10 The novel coating composition may also include other conventional formulation additives, such as, wetting agents, leveling and flow control agents, for example, Resiflow®S (polybutylacrylate), BYK® 320 and 325 (high molecular weight polyacrylates), BYK® 347 (polyether-modified siloxane), rheology control agents, such as, fumed silica,
15 defoamers, surfactants and emulsifiers to help stabilize the composition. Other additives that tend to improve mar resistance can be added, such as, silsesquioxanes and other silicate-based micro-particles.

The coating composition of this invention can be used as a clear coat that is applied over a pigmented base coat that may a pigmented
20 version of the composition of this invention or another type of a pigmented base coat. The clear coating can be in solution or in dispersion form.

Typically, a clear coating is then applied over the base coating before the base coating is fully cured, a so called "wet-on-wet process", and the base coating and clear coating are then fully cured at ambient
25 temperatures or can be cured by heating to elevated temperatures of 50°C to 100°C for 15 to 45 minutes. The base coating and clear coating preferably have a dry coating thickness ranging from 25 to 75 microns and 25 to 100 microns, respectively.

The novel coating composition may be used as a base coat or
30 as a pigmented monocoat topcoat. Both of these compositions require the presence of pigments. Typically, a pigment-to-binder ratio of 0.1/100 to 200/100 is used depending on the color and type of pigment used. The pigments are formulated into mill bases by conventional procedures, such as, grinding, sand milling, and high speed mixing. Generally, the mill base
35 comprises pigment and a dispersant in an aqueous medium. The mill

base is added in an appropriate amount to the coating composition with mixing to form a pigmented coating composition.

Any of the conventionally-used organic and inorganic pigments, such as, white pigments, like, titanium dioxide, color pigments, metallic flakes, such as, aluminum flake, special effects pigments, such as, coated mica flakes, coated aluminum flakes and the like and extender pigments can be used. It may be desirable to add flow control additives.

The novel coating composition may be used as a primer in which case typical pigments used in primers would be added, such as, carbon black, barytes, silica, iron oxide and other pigments that are commonly used in primers in a pigment-to-binder ratio of 150/100 to 300/100.

The coating composition can be applied by conventional techniques, such as, spraying, electrostatic spraying, dipping, brushing, and flow coating.

The coating composition is particularly useful for the repair and refinish of automobile bodies and truck bodies and parts as a clear coat, pigmented base coat, or as a primer. The novel composition has uses for coating any and all items manufactured and painted by automobile sub-suppliers, frame rails, commercial trucks and truck bodies, including but not limited to beverage bodies, utility bodies, ready mix concrete delivery vehicle bodies, waste hauling vehicle bodies, and fire and emergency vehicle bodies, as well as any potential attachments or components to such truck bodies, buses, farm and construction equipment, truck caps and covers, commercial trailers, consumer trailers, recreational vehicles, including but not limited to, motor homes, campers, conversion vans, vans, large commercial aircraft and small pleasure aircraft, pleasure vehicles, such as, snow mobiles, all terrain vehicles, personal watercraft, motorcycles, and boats. The novel composition also can be used as a coating for industrial and commercial new construction and maintenance thereof; cement and wood floors; walls of commercial and residential structures, such as, office buildings and homes; amusement park equipment; concrete surfaces, such as parking lots and drive ways; asphalt and concrete road surface, wood substrates, marine surfaces; outdoor structures, such as bridges, towers; coil coating; railroad cars; printed circuit boards; machinery; OEM tools; signs; fiberglass structures; sporting goods; and sporting equipment.

The following are testing procedures used in the Examples:

20° Gloss – measure using a Byk Gardner Micro-tri-gloss portable measuring unit. A rating of at least 70 is an acceptable minimum.

5 DOI – distinctness of image – test method ASTM D5767 – a Dorigon II unit was used. A rating of at least 70 is an acceptable minimum.

10 Persoz Hardness Test – the change in film hardness of the coating was measured with respect to time after application by using a Persoz Hardness Tester Model No. 5854 [ASTM D4366] supplied by Byk-Mallinckrodt, Wallingford, CT. The number of Oscillations [referred as Persoz No.] are recorded.

QUV Exposure Test

15 Powerchron panels model APR18796 obtained from ACT, Hilldale, Michigan were coated with 1 mil (25.4 micron) thick DuPont Chromabase refinish white base coat coded B8469. The panels were allowed to age under ambient temperature conditions for one week and then the test clear coating composition was applied with a 0.010 inch
20 clearance bird applicator to form a coating having a dry film thickness of 40 to 75 microns. The panel were then placed in a QUV Weathering Tester Model QUV/se from Q-Panel Lab Products. The panels were exposed to the following two test cycles over every 24 hour period:

25 Cycle 1 – 8 hours at 70°C with irradiance of 0.68W/m²/nm at 340 nm with no condensation .

Cycle 2 – 4 hours at 50°C with no irradiance.

At various set intervals the panels were evaluated for gloss, distinctness of image and color.

Swelling Ratio at 3 days

30 The swelling ratio of the film was determined after 3 days from the initial drawn down of a coating on a panel of TPO (thermoplastic polyolefin).

After the coating was dry, a free film was lifted off of the TPO using a single edge razor. A circular sample was punched form the film

with a 3.1 mm grid punch. The film was positioned between two sheets of aluminum foil and a circular sample 3.1mm in diameter was punched out and the foil removed and the sample was mounted on a slide. The diameter of the sample was measured with a microscope equipped with a filar micrometer. The original diameter is D_o . Methylene chloride was dropped onto the sample and a glass panel was placed over the sample. When the swelling reached equilibrium the swollen diameter of the sample was measured D_s . The swelling ratio was then determined. Swell Ratio = $(D_s/2)^2/(D_o/2)^2$. The swell ratio is a measure of the cure and the following ratings were used:

	Cure	Swelling Ratio (3 days)
	Excellent	less than 1.55
	Very Good	1.55-1.65
	Good	1.66-1.75
15	Fair	1.76-1.85
	Poor	1.86-2.00
	Very Poor	Greater than 2.00

Dry to Assemble Test

A steel panel is coated with the coating composition using the above bird applicator to form a film 40 to 75 microns thick. The time of application is noted as T_1 . Every 10 minutes after application the panel is placed on a top loading balance and pushed down with the force of 2 kgm and the thumb is twisted. 15 minutes are allowed for any deformation to disappear. The time the deformation does not appear is recorded as T_2 . The dry to assembly time = $T_2 - T_1$.

The following examples illustrate the invention. All parts and percentages are on a weight basis unless otherwise indicated. Molecular weights are determined by GPC (Gel Permeation Chromatography) using polymethyl methacrylate as the standard.

EXAMPLE**Preparation of the clearcoat composition**

The following components were used to prepare Clear Coating Compositions 1-5:

5 Desmodur® 1420 – reaction product of methylene bis (cyclohexyl amine) and diethyl maleate in a 2:1 molar ratio sold by Bayer Corporation, Pittsburgh, Pa.

 Acetic Acid Solution – 10% by weight acetic acid in butyl acetate.

10 Tinuvin® 384 Solution– 25% solution in butyl acetate of a substituted benzotriazole derivative from Ciba Specialty Chemicals, Basel, Switzerland.

 Tinuvin® 292 Solution– 25% solution in butyl acetate of bis(1,2,2,6,6-pentamethyl-4-piperidiny)l sebacate) available from Ciba
15 Specialty Chemicals, Basel, Switzerland.

 Siloxane Solution- 1% solution in butyl acetate of a polyether modified dimethylpolysiloxane called Byk-333 from Byk-Chemie.

 Irganox® 1010 Solution- 10% solution in butyl acetate of benzenepropanoic acid, 3,5-bis(1,1-dimethyl-ethyl)-4-hydroxy-C7-C9
20 branched alkyl esters.

 Irganox® 1135 Solution- 10% solution in butyl acetate of a liquid hindered phenolic antioxidant from Ciba Specialty Chemicals.

 Sanko® HCA Solution- 10% solution in butyl acetate of 9,10-dihydro-9-oxa-10-phosphenanthrene-10-oxide from Sanko Chemical
25 Corporation.

 Desmodur® 3300- trimer of hexamethylene diisocyanate from Bayer Corporation.

 Clear Coating Compositions 1-5 were each prepared by charging the components shown in Table 1 into a mixing vessel and
30 mixing the components of Part 1 together and Part 2 together. Just before application of the coating composition to a substrate, Parts 1 and 2 were mixed together:

Table 1

Components	Comp. 1	Comp. 2	Comp. 3	Comp. 4	Comp. 5
<u>Part 1</u>					
Desmodur®142 0 Solution	32.82	32.67	32.67	33.84	32.51
Acetic Acid Soln.	1.45	1.44	1.44	1.49	1.43
Tinuvin® 384 Solution	3.48	3.46	3.46	0	3.44
Tinuvin® 292 Solution	3.48	3.46	3.46	0	3.44
Siloxane 11277 Solution	5.80	5.77	5.77	5.77	5.74
Irganox® 1010 Solution	0	0	0	0	2.87
Irganox® 1135 Solution	0	2.88	0	0	0
Sanko® HAC Solution	0	0	2.88	0	2.87
Butyl Acetate	27.72	25.18	25.18	38.65	22.66
<u>Part 2</u>					
Desmodur® 3300	25.22	25.10	25.10	26.00	24.98
NCO/OH ratio	1.1/1	1.1/1	1.1/1	1.1/1	1.1/1

5 The above prepared clear coating composition 1-5 were each applied by spraying as a clear coat onto a phosphatized steel panel coated with a cured cathodic epoxy resin based electrodeposition primer over which a black pigmented waterborne base coating composition of an acrylic polymer crosslinked with a melamine resin was applied to a wet film thickness of 12.7-20.32 microns (0.5-0.8 mils), flash dried for 5 minutes and baked for 10 minutes at 82°C (180°F). The above prepared

clear coating was applied to a wet film thickness of 58-63 microns (2.3-2.5 mils) and cured at ambient temperatures.

The following tests were conducted on each of the panels: Dry to Assembly Test, Persoz hardness after 1 hour and Swelling ratio at 3 days. The results are shown in Table 2.

Table 2


Composition	1	2	3	4	5
Dry to Assemble time in minutes	36	34	33	30	30
Persoz Hardness after one hour	36	35	27	31	26
Swelling Ratio at 3 days	1.78	1.75	1.73	1.74	1.61
20 ° Gloss after 7000 hrs of exposure in QUV	0	73	29	0	55
DOI after 7000 hrs of exposure in QUV	0	84	11	0	56

The test results for Dry to Assemble time, Persoz Hardness and Swelling Ratio after 3 days were acceptable for Compositions 1-5 which shows that the additives added to Compositions 2, 3 and 5 did not adversely affect these important properties.

Another set of panels was prepared as above and exposed to QUV accelerated weathering device and the 20°Gloss and DOI results for 7000 hours exposure in the QUV accelerated weathering device are shown in Table 2 above. Compositions 1 and 4 that did not contain disubstituted phenolic antioxidants or phosphite type hydroperoxide decomposers stabilizers failed completely.

The following Graph 1 shows 20°Gloss versus hours in the QUV weathering device at various times of exposure. The circles on the graph represent Composition 1, the squares Composition 2, the diamonds, Composition 3, the triangles, Composition 4 and the solid circles Composition 5. Compositions 2, 3 and 5 represent the invention where either a disubstituted phenolic antioxidant or phosphite type hydroperoxide decomposer was included.

Graph 1

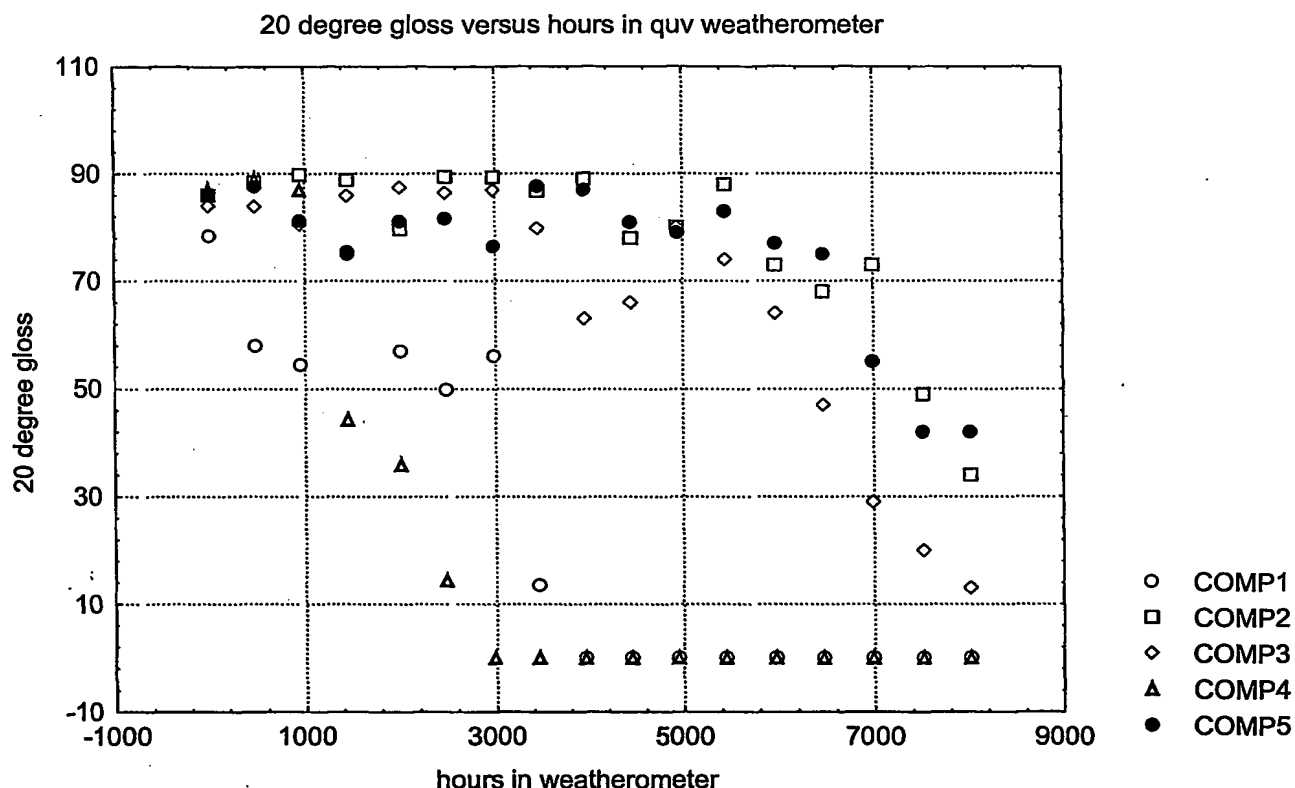

In summary, the above graph shows unacceptable QUV weathering for Composition 1 that did not contain a disubstituted phenol antioxidant and Composition 4 that did not contain a disubstituted phenol antioxidant, or a UV absorber or a hindered amine light stabilizer. Compositions 2, 3 and 5 that represent the invention that contained the antioxidant, UV light absorber and hindered amine light stabilizer in combination with the aspartic acid derivative had significantly improved weathering properties in comparison to Compositions 1 and 4.


CLAIMS

1. A coating composition comprising a binder consisting essentially of

a. polyisocyanate crosslinking agent;

5

b. an isocyanate-reactive component having at least one compound having the following formula:

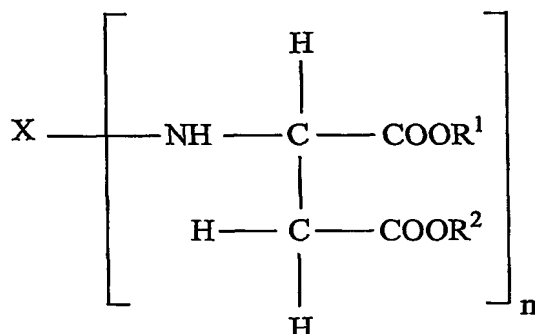

10

wherein X is an aliphatic or cycloaliphatic group, R¹ and R² are the same or different organic groups that are inert to isocyanate groups, and n is 2 to 4, and

15

c. optionally, a polymeric component having a number average molecular weight of 5,000 to 50,000 and having reactive groups that crosslink with an isocyanate, where the reactive groups are selected from the group consisting of hydroxyl, carboxyl, glycidyl, amine and any mixtures thereof; and

20

d. optionally, an oligomeric component having a number average molecular weight of 300 to 3,000 having reactive groups that crosslink with an isocyanate, where the reactive groups are hydroxyl, carboxyl, glycidyl, amine, aldimines, phosphoric acid, ketimine and any mixtures thereof; and

25

e. additives consisting essentially of:

- (1) a disubstituted phenol antioxidant or a hydroperoxide decomposer,
- (2) an ultraviolet light absorber, and
- (3) a hindered amine light stabilizer.

5

2. The coating composition of claim 1 in which X is a cycloaliphatic group and R¹ and R² are aliphatic groups.

10 3. The coating composition of claim 2 in which X is a cycloaliphatic group and R¹ and R² are alkyl groups having 2 to 8 carbon atoms.

15 4. The coating composition of claim 1 in which the isocyanate reactive component is the reaction product of methylene bis(cyclohexyl amine) and dialkyl maleate.

20 5. The coating composition of claim 1 wherein the binder contains 1 to 50% by weight, based on the weight of the binder, of an acrylic polymer having a number average molecular weight of 5,000 to 50,000 and having groups reactive with isocyanate.

25 6. The coating composition of claim 5 the acrylic polymer consists essentially of polymerized monomers selected from the group consisting of linear alkyl (meth)acrylates having 1 to 12 carbon atoms in the alkyl group, alkyl (meth)acrylates having 1 to 12 carbon atoms in the alkyl group, cyclic or branched alkyl (meth)acrylates having 3 to 12 carbon atoms in the alkyl group, isobornyl (meth)acrylate, styrene, alpha methyl styrene, (meth)acrylonitrile, (meth)acryl amides, and polymerized monomers that provide groups reactive with isocyanate selected from the group consisting of hydroxy alkyl (meth)acrylates, glycidyl (meth)acrylates, amino alkyl(meth)acrylates and (meth)acrylic acid.

30

7. The coating composition of claim 6 wherein the acrylic polymer has a hydroxyl equivalent weight of 300 to 1300 and consists essentially of polymerized monomers selected from the group consisting of alkyl (meth)acrylates having 1 to 12 carbon atoms in the alkyl group, cyclic or branched alkyl (meth)acrylates having 3 to 12 carbon atoms in the alkyl group, isobornyl methacrylate, styrene, alpha methyl styrene, (meth)acrylonitrile, (meth)acryl amides, and polymerized monomers consisting of hydroxy alkyl (meth)acrylates having 1 to 4 carbon atoms in the alkyl group.

10

8. The coating composition of claim 7 wherein the acrylic polymer consists essentially of styrene, ethylhexyl methacrylate, isobornyl methacrylate and hydroxyethyl methacrylate.

15

9. The coating composition of claim 1 wherein the binder contains 1 to 50% by weight, based on the weight of the binder, of an acrylic oligomer having a number average molecular weight of 300 to 3,000 and having groups reactive with isocyanate selected from the group consisting of hydroxyl, carboxyl, glycidyl, amine, aldimines, phosphoric acid, ketimine and any mixtures thereof.

20

10. The coating composition of claim 9 wherein the oligomer consists essentially of polymerized monomers selected from the group consisting of linear alkyl (meth)acrylates having 1 to 12 carbon atoms in the alkyl group, alkyl (meth)acrylates having 1 to 12 carbon atoms in the alkyl group, cyclic or branched alkyl (meth)acrylates having 3 to 12 carbon atoms in the alkyl group, isobornyl (meth)acrylate, styrene, alpha methyl styrene, (meth)acrylonitrile, (meth)acryl amides, and polymerized monomers that provide groups reactive with isocyanate selected from the group consisting of hydroxy alkyl (meth)acrylates, glycidyl (meth)acrylates, amino alkyl(meth)acrylates and (meth)acrylic acid.

25

30

11. The coating composition of claim 1 wherein the polyisocyanate is selected from the group consisting of aliphatic

35

polyisocyanates, cycloaliphatic polyisocyanates, aromatic polyisocyanates and isocyanate adducts.

12. The coating composition of claim 1 in which the
5 polyisocyanate is selected from the group consisting of isophorone diisocyanate, hexamethylene diisocyanate, and trimer of hexamethylene diisocyanate.

13. The coating composition of claim 1 wherein the binder
10 contains 1 to 50% by weight, based on the weight of the binder, of a polyester having hydroxyl groups.

14. The coating composition of claim 1 wherein the binder
15 contains 1 to 50% by weight, based on the weight of the binder, of a urethane oligomer that is the reaction product of a polyisocyanate selected from the group consisting of an aliphatic polyisocyanate and a cycloaliphatic polyisocyanate; a hydroxy functional aliphatic carboxylic acid and a monohydric alcohol selected from the group consisting of aliphatic monohydric alcohol and cycloaliphatic monohydric alcohol.

20

15. The coating composition of claim 14 wherein the urethane oligomer consists essentially of the reaction product of the isocyanurate of hexane diisocyanate, cyclohexanol, dimethylol propionic acid.

25

16. The coating composition of claim 1 which contains about 0.1% to 5% by weight, based on the weight of the binder, of an ultraviolet light absorber.

30


17. The coating composition of claim 1 which contains about 0.1% to 5% by weight, based on the weight of the binder, of a di-substituted phenol antioxidant.

18. The coating composition of claim 1 which contains about 0.1% to 5% by weight, based on the weight of the binder, of a hydroperoxide decomposer.
- 5 19. The coating composition of claim 1 which contains about 0.1% to 5% by weight, based on the weight of the binder, of a hindered amine light stabilizer.
20. A substrate coated with the composition of claim 1.
- 10 21. A substrate having a base coating of a pigmented coating composition, which is top coated with a clear coating of the composition of claim 1.
- 15 22. A substrate having a multi-layer coating comprising a pigmented primer coating of the composition of claim 1, a base coating of a pigmented coating composition, and a top-coating of a clear coating of the composition of claim 1.
- 20 23. A process for coating an auto body or auto part which comprises
- applying a base coating of a pigmented coating composition to a substrate;
- applying a top-coating of a clear coating of the composition of claim 1 over the base coating and
- 25 curing the base coating and top-coating to form a base coat/ clear coat finish on the substrate.
- 30 24. An auto body or auto part coated with the composition of claim 1.
25. A two component coating composition comprising

Component A comprising a polyisocyanate crosslinking agent; and

Component B comprising an isocyanate-reactive component having at least one compound having the following formula:

5

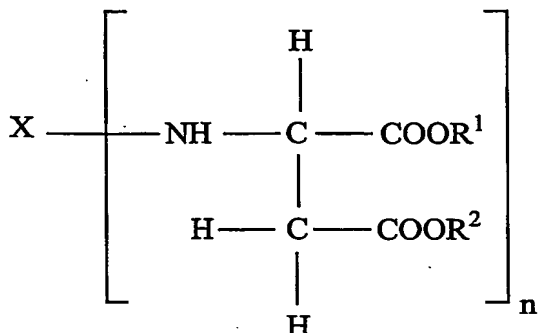

wherein X is an aliphatic or cycloaliphatic group, R¹ and R² are the same or different organic groups that are inert to isocyanate groups, and n is 2 to 4, and

10

optionally, a polymeric component having a number average molecular weight of 5,000 to 50,000 and having reactive groups that crosslink with an isocyanate, where the reactive groups are hydroxyl, glycidyl amine and any mixtures thereof; and

15

optionally, an oligomeric component having a number average molecular weight of 300 to 3,000 having reactive groups that crosslink with an isocyanate, where the reactive groups are hydroxyl, carboxyl, glycidyl, amine, aldimines, phosphoric acid, ketimine and any mixtures thereof; and

20

the following additives consisting essentially of:

a di-substituted phenol antioxidant or a hydroperoxide decomposer, an ultraviolet light absorber, and a hindered amine light stabilizer;

wherein Components A and B are thoroughly mixed together before application to a substrate.

25

INTERNATIONAL SEARCH REPORT

national Application No

PCT/US2004/000097

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C08G18/38 C09D175/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08G C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 399 736 B1 (HILLMAN KENNETH M ET AL) 4 June 2002 (2002-06-04) column 1, line 48 - line 56 column 2, line 37 - column 13, line 64 ---	1-22, 25
X	US 5 412 056 A (ZWIENER CHRISTIAN ET AL) 2 May 1995 (1995-05-02) cited in the application examples ---	1-25
X	US 5 580 945 A (WADE ROBERT A ET AL) 3 December 1996 (1996-12-03) cited in the application column 1, line 40 - line 67 column 4, line 1 - line 26 column 5, line 47 - line 52 claim 1; tables 1, 2 ---	1-25
	--- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

11 May 2004

Date of mailing of the international search report

01/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Vaccaro, E

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US2004/000097

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 591 807 A (HAWRYSKO WALTER E ET AL) 7 January 1997 (1997-01-07) column 4, line 15 -column 6, line 66 example B	1-25
X,P	WO 03/057374 A (DOW GLOBAL TECHNOLOGIES INC ;ANATER MARK T (US); LI ZHICHENG (US);) 17 July 2003 (2003-07-17) page 5, line 6 - line 20 page 1, line 16 - line 24 page 7, line 22 -page 8, line 6 page 9, line 18 -page 10, line 20 examples 1,2; tables 1,2	1-25

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US2004/000097

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6399736	B1	04-06-2002	US 6013755 A US 2002103326 A1	11-01-2000 01-08-2002
US 5412056	A	02-05-1995	DE 4327853 A1 AT 173287 T CA 2130166 A1 DE 59407266 D1 EP 0639628 A1 ES 2123691 T3 JP 7082524 A	23-02-1995 15-11-1998 20-02-1995 17-12-1998 22-02-1995 16-01-1999 28-03-1995
US 5580945	A	03-12-1996	CA 2159395 A1	30-05-1996
US 5591807	A	07-01-1997	NONE	
WO 03057374	A	17-07-2003	US 2003118739 A1 WO 03057374 A2 US 2004005413 A1	26-06-2003 17-07-2003 08-01-2004